

15" SIGNATURE SERIES REFRIGERATOR

HP15RS-3 15" INDOOR MODEL
HP15RO-3 15" OUTDOOR MODEL



Glass Door Model



Solid Door Model



Drawer Model

GENERAL SIGNATURE SERIES FEATURES



- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- **Industry Exclusive** full extension refrigerator shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Drawer models feature self-closing slides
- Adjustable Crisp White and Cool Blue LED lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- State-of-the-art digital control module
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

HP15RS/RO FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door, stainless steel drawers or panel ready drawers
- Refrigerator rated for both food and beverage storage
- Includes two (2) full extension refrigerator shelves (excluding drawer models)
- Storage for 66 cans
- Refrigerator temperature 33°- 42°F

OPTIONAL ACCESSORIES

(L)	Factory Installed Lock
67990-L/R	Stacking Kit for HP15 models
66736-15	Caster Kit for HP15 models

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit perlick.com/residential

PRODUCT SPECIFICATIONS

Product Width	14-7/8" (378 mm.)
Product Height	34-1/4" (870 mm.)
Product Depth	24" (610 mm.)
Opening Width	15" (381 mm.)
Opening Height	34-1/2" (876 mm.)
Opening Depth**	24-7/8" (632 mm.)
Refrigerated Volume	2.8 cu. ft.
Door Swing Clearance	16" (406 mm.) minimum
Electrical	115V, 60Hz., 1 Phase, 2.3 amps
Compressor	525 BTU, standard
Plumbing	None Required
Annual Energy Usage	280 kWh/yr
Shipping Weight	150 lbs (68.04 kg)

** Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

INDOOR MODELS


HP15RS-3-1L*	Stainless steel solid door, hinge left
HP15RS-3-2L*†	Panel ready solid door, hinge left
HP15RS-3-3L*	Stainless steel glass door, hinge left
HP15RS-3-4L*†	Panel ready glass door, hinge left
HP15RS-3-5	Stainless steel drawers
HP15RS-3-6†	Panel ready drawers

OUTDOOR MODELS

HP15RO-3-1L*	Stainless steel solid door, hinge left
HP15RO-3-2L*†	Panel ready solid door, hinge left
HP15RO-3-3L*	Stainless steel glass door, hinge left
HP15RO-3-4L*†	Panel ready glass door, hinge left
HP15RO-3-5	Stainless steel drawers
HP15RO-3-6†	Panel ready drawers

* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

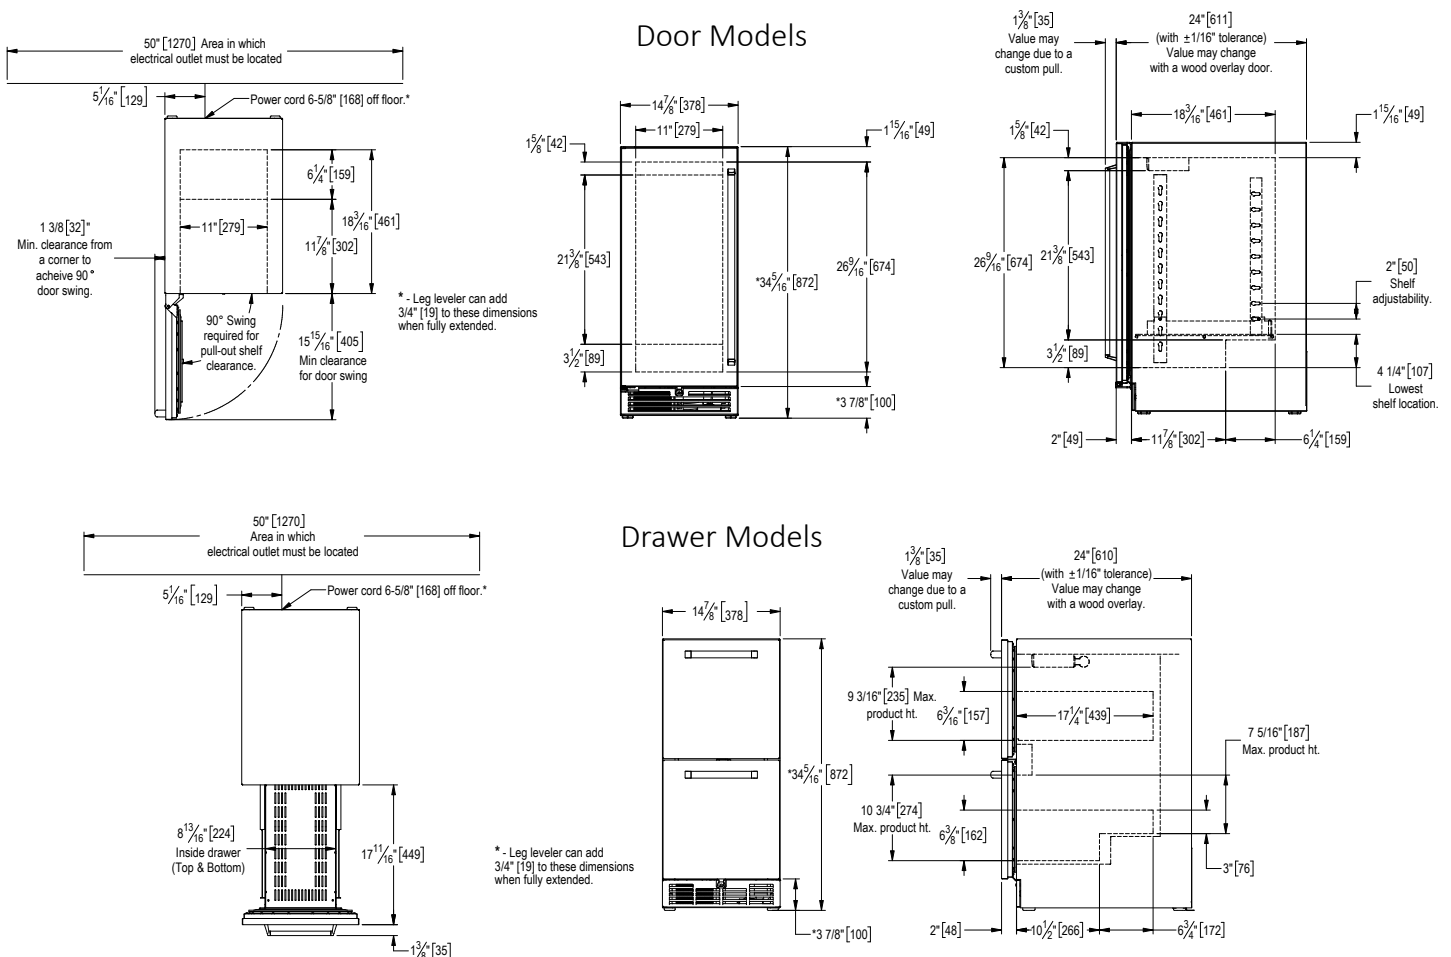

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

FORM NO. Z2530
REV. A-09/07/2018