




PATENTED SHALLOW-DIP-TECHNOLOGY + CONTACT HEAT

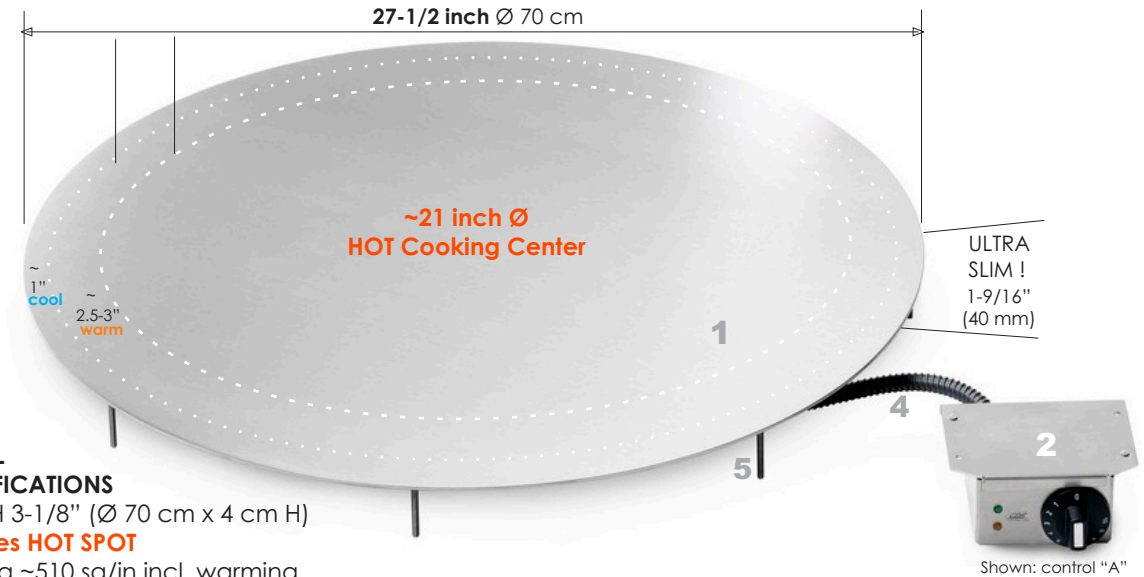

**TEPPANYAKI GRILL
COOK TOP SPECIFICATIONS**

Size: Ø 27-1/2" x H 3-1/8" (Ø 70 cm x 4 cm H)

~330 square inches HOT SPOT

total cooking area ~510 sq/in incl. warming

INDOOR + OUTDOOR USE IPX4 RATED

Material: Professional Food Grade Best Alloy

German Stainless Steel type 304 (V2A)

1/8" thick (3 mm) cold pressed, hand-

welded. Built-to-last. Silk-brushed finish.

Power: **1800 Watt** | 1.8 kWh on high

Electric: **120V** | 50-60 Hz | **20 AMP**

ProStyle **2250 Watt** | 240V | **10 AMP**

Analog temperature control:

1-10 dial | 2 indicator lights | thermostat

Contact Heat: 150°F to 450°F (65°-230°C)

5 Year Limited Manufacturer Warranty.

Electrical + electronic parts:

1 year limited manufacturers' parts + labor

CE/ GS/ VDE Safety Approvals. Electrical +
Electronic Components: UL approved.



- 1 SOLID STAINLESS STEEL GRILL TOP
- 2 CONTROL BOX "A" for open under mount Box "B"
- 3 faceplate w/indicator lights + dial knob
- 4 FLEXIBLE CONDUIT
- 5 STAINLESS STEEL MOUNTING BOLTS 1-3/4" stainless steel washers & nuts included

POWER CORD, 10 ft./3m included

COOKING GUIDE, included

Ship weight 43 lbs. | ship size 36" x 31" x 7"

Ship weight 18 kg | ship size 93 x 74 x 13 cm



The manufacturer reserves the right to update, change, alter or discontinue any model without further notice.

Shown accessories not included.



SINCE 1887 - OVER 125 YEARS OF INNOVATION & PRECISION MANUFACTURING



Stainless steel production uses up to 80% recycled raw material




Electrical Rating: 120V | 1800 Watt | 15 AMP | 50-60 Hz
1.8 kWh on high (alt. 240V/1800 Watt, 8 AMP or ProStyle 2250W-240V, 10 AMP)

▶▶ ALWAYS Check control box label for correct voltage BEFORE plugging in!

Bolts are 1-3/4 inch (45 mm) long; bolt diameter is 13/64"Ø (5 mm) ▶▶ drill 5/16"Ø (8 mm)

!!! IMPORTANT: DO NOT DRILL NOR CUT ANY HOLES BEFORE UNIT IS PHYSICALLY PRESENT !!! DO NOT CUT OFF THE BOLTS !!! DO NOT OPEN CONTROL BOX OR WARRANTY BECOMES VOID !!!

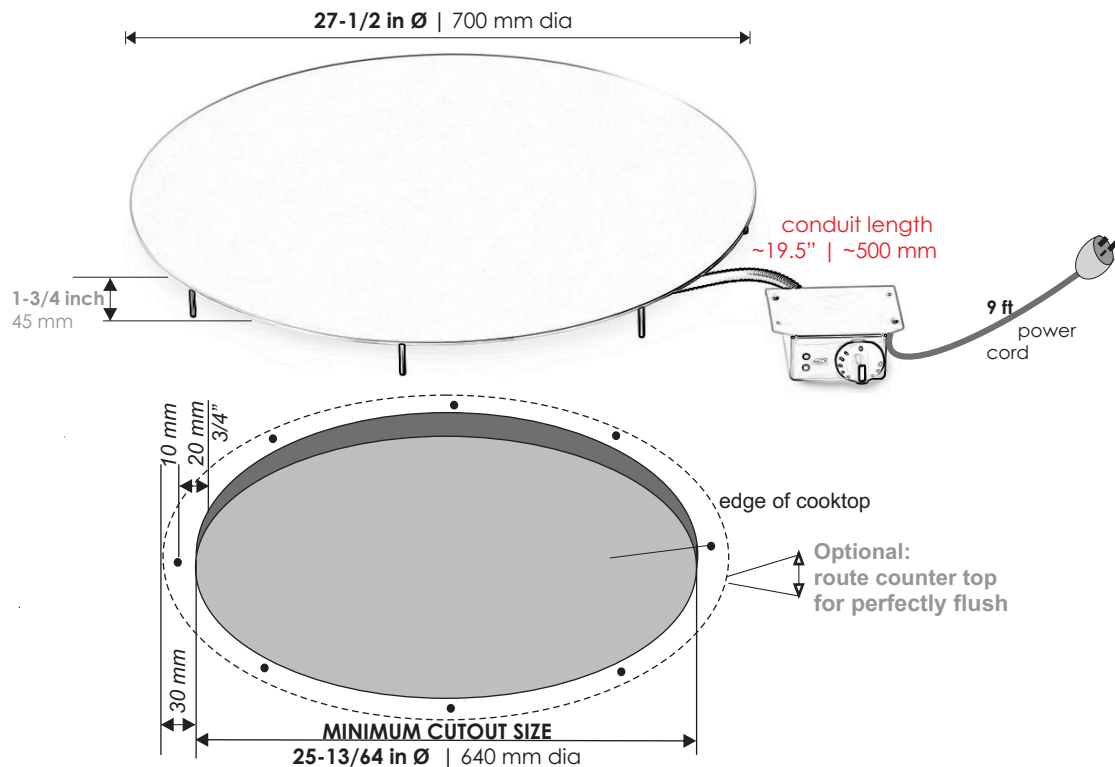

▶▶ The Control Box **MUST** be firmly fastened to a **NON-MOVING** surface. Secure cords/conduits. No dangling!

▶▶ **CAUTION: DO NOT SNAP, PULL or TWIST THE CONDUIT DURING INSTALLATION !!!**

Warranty will become void if capillary tube (thermostat) inside the conduit is damaged during installation.

1. Mark bolt holes, drill 5/16 inch Ø | 8 mm Ø - bolts will fit holes loosely. Clean counter surface thoroughly!!!

2. Clean underside edges of unit with rubbing alcohol or similar.

Apply thin bead of Silicone Sealant around the edges of the underside of the unit. Do not leave any gaps. This protects from potential moisture intrusion, especially when installed outside without overhead cover.

!!! IMPORTANT NOTE: MAKE SURE TO PREVENT SILICONE FROM GETTING INTO THE BOLT HOLES !!!

3. Slide cook top into place. Do not apply excessive force. Studs need to go in without any resistance.

Press evenly down to compress Silicone. Secure with supplied nuts and washers from underneath.

Find all nuts, washers and the extension key for "B" control in a small plastic bag inside the pouch.

!!! IMPORTANT: Tighten nuts with hand tool only. Do not use any power tools!!!

4. Mark, drill and fasten the control box into place ▶▶ **REFER TO SEPARATE INSTALL SHEET FOR "B" CONTROL**

Optional: seal the round metal plate with Silicone to prevent potential moisture intrusion.


IMPORTANT: Check product label + outlet for correct voltage!!! Now connect the power cord VERY FIRMLY to the rear of the control box. Connect the electrical 3-prong plug to a properly grounded power outlet.



Bolts/studs are 1-3/4 inch (45 mm) long; bolt/stud diameter is 3/16"Ø (5 mm) ▶▶ drill 5/16"Ø (8 mm) !!!

VERY IMPORTANT:

▶▶ **DO NOT CUT OR DRILL BEFORE UNIT IS PHYSICALLY PRESENT. DO NOT CUT OFF THE BOLTS/STUDS!**

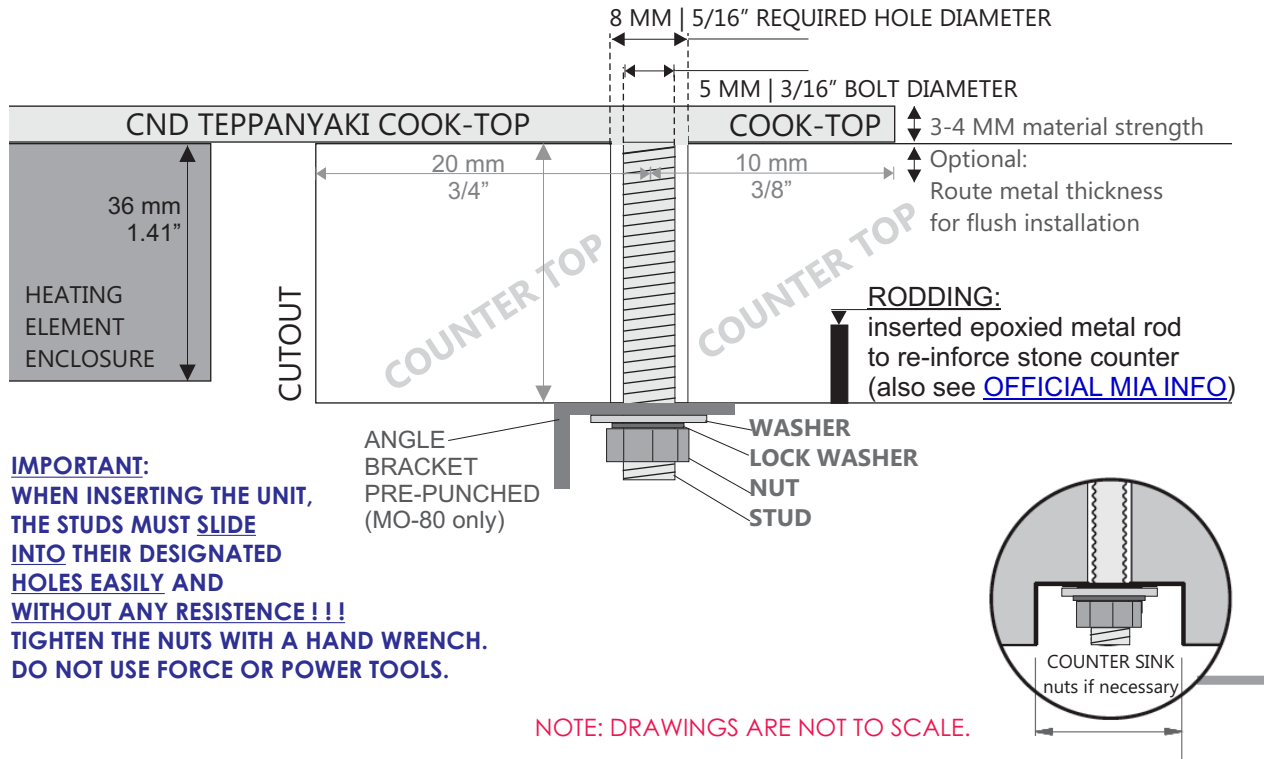

IMPORTANT:
 WHEN INSERTING THE UNIT,
 THE STUDS MUST SLIDE
 INTO THEIR DESIGNATED
 HOLES EASILY AND
 WITHOUT ANY RESISTANCE !!!
 TIGHTEN THE NUTS WITH A HAND WRENCH.
 DO NOT USE FORCE OR POWER TOOLS.

NOTE: DRAWINGS ARE NOT TO SCALE.

▶▶ **ATTENTION !!! MUST READ !!! INSTALLATION INTO STONE/GRANITE COUNTER TOPS !**

Please be reminded that the CND stainless steel grill surface will flex slightly when switched on thus developing a shallow dip in the cooking center. This motion is intended and is counteracted by the secured bolts, which hold the unit in place.

If you install into a natural stone or granite counter-top, please talk to your supplier/installer about your plans. You must provide them with a full set of install sheets ahead of time. A stone professional will be able to advise you on any aspects to watch out for, e.g. on how much counter-top ("meat") is necessary at the narrowest point for the particular stone of choice to accommodate a Cook-N-Dine built-in unit properly. Min. 6" are advised.

PLEASE NOTE: COUNTER TOP THICKNESS OF 1.57 INCH IS MANUFACTURER RECOMMENDED UNLESS MATERIAL HAS BEEN RE-INFORCED BY MEANS OF RODDING OR COMPARABLE.

RODDING is a professional business practice for porous, fissured or "brittle" Natural Stone/Granite. The narrow areas of material are reinforced on the underside surrounding large cutouts (e.g. for sinks, stoves, cook tops). This will support and strengthen those areas and is intended to prevent possible damage.

CND offers 304 stainless steel custom-made 12 gauge pre-punched angle brackets (order separately, for MO-80 only) which can be installed along the full length of the cutout (both long sides). The unit is fastened through the bracket's holes (see above). Stress applied to the counter material during operation should thus be evenly distributed. **VERY IMPORTANT:** The use of brackets cannot guarantee the prevention of damage. Everything strictly depends on the natural properties of the counter top material. Therefore, Cook-N-Dine cannot be held responsible for any type of damage to stone counter tops. Also see [Marble Institute of America Info](#).

Make sure to HAVE THE UNIT and ALL install sheets ON SITE ahead of time for counter top templating!


▶▶ **CAUTION: DO NOT SNAP, PULL or TWIST THE CONDUIT DURING INSTALLATION !!!**
 Warranty becomes void if capillary tube inside the conduit (thermostat) is damaged during installation. Control box must be firmly fastened to a non-moving surface.






▶▶ CAUTION: DO NOT SNAP, PULL or TWIST THE CONDUIT DURING INSTALLATION !!!
Warranty will become void if capillary tube inside the conduit is damaged during installation.
Control box must be firmly fastened to a non-moving surface.

▶▶ VERY IMPORTANT NOTE: Do not open the control box or warranty expires!

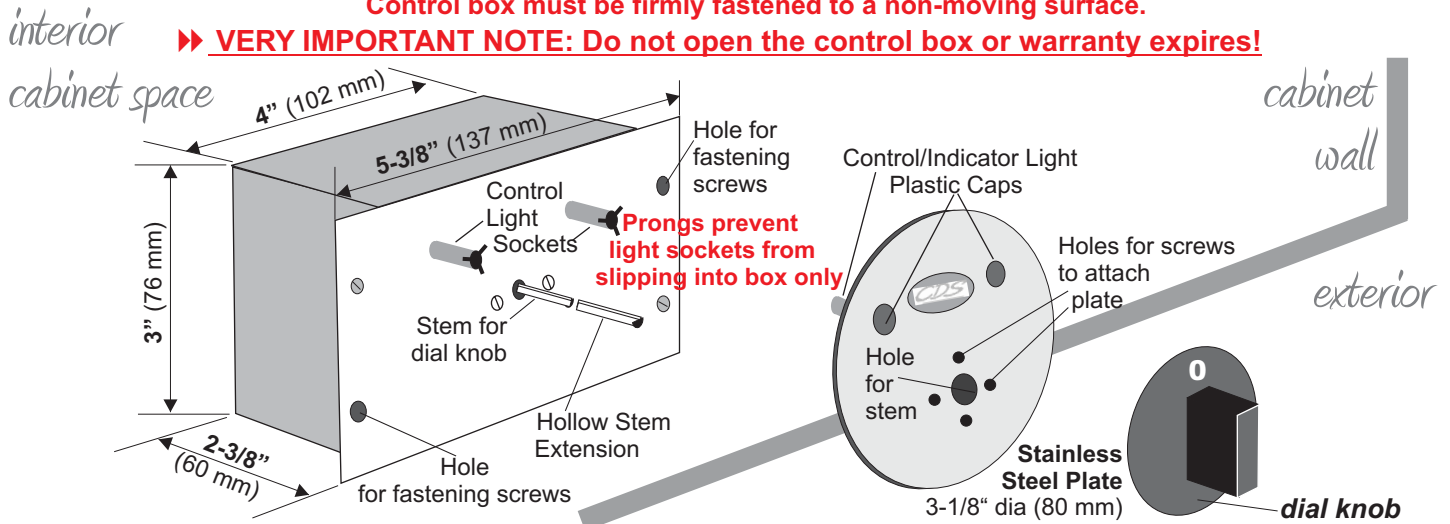

DIRECTIONS:

1. Remove packaging and carefully pull off the DIAL KNOB ONLY while holding on to the round plate. Do not use force or tools!
2. Now separate the round steel plate from Control Light Sockets by carefully wiggling it away WITH the yellow and green light plastic caps. Hold one with two fingers and gently pull plate away; repeat with other. Yellow and green PLASTIC CAPS STAY IN PLACE in the plate.
3. Mark all necessary holes utilizing the provided template below. Drill required holes and gently thread light sockets through their designated openings. **DO NOT SNAP THE PRONGS!** Now fasten the box to interior of cabinet wall or underneath counter top.
4. Gently pull light sockets out a little bit and re-connect with plastic caps in the metal plate; affix plate with two small flathead screws, or silicone into place. **CAUTION: DO NOT TWIST OR SNAP DELICATE WHITE WIRING OF INDICATOR LIGHTS.**
5. Connect the hollow extension to stem if needed (packed with nuts + washers). Slide dial knob onto stem (match flat side of stem with flat side of female receptacle at back of knob). Do not use force. The "0" has to align centered below the CDS logo.

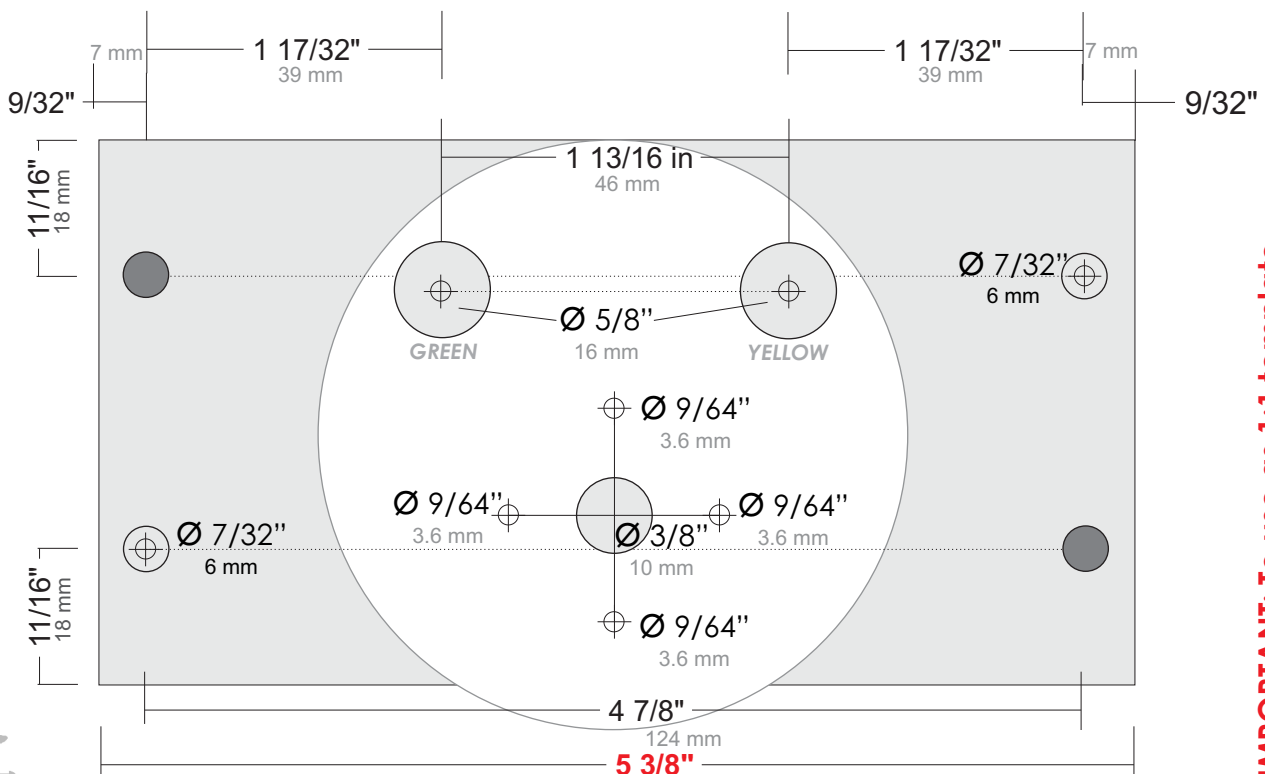

▶▶ 137 mm - PLEASE MEASURE ACROSS TO MAKE SURE TEMPLATE IS 1:1



IMPORTANT: To use as 1:1 template set "page scaling" to "none" when printing